INSTALLATION INSTRUCTIONS

Model # 8991/8992/8993

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

1. Shut off power at the circuit breaker and remove old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. You need to make two holes on the wall in correct position in accordance with the long strap (B) and the outlet box (A), then insert the anchor (I) into the hole.
4. Pull black and white wires out of electrical outlet box (A).
5. Thread the nipple (C) into the pre-drilled holes in the long strap (B) spaced the same distance apart as the holes in the bottom back plate (K).
6. Attach long Strap (B) using Outlet Box Screws (D) to the outlet box (A), Screw the wood screws (G) into the anchor (I) (Fig 1).
7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture 's Ground wire to it. Otherwise, connect the fixture 's Ground wire directly to the long strap using the Green Screw (J) provided.
8. To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone Sealant to outline the outside of fixture back plate (F) where it meets the wall leaving a space at bottom to allow moisture a means to escape.
9. Place the bottom back plate (K) into nipple (D) and stud (H), then secure it tightly against the wall using cap nut (E,F). (Fig 1)
10. At this point, unscrew the screws (M&O), remove the top cover (N) with the top back plate (L) gently to install the light bulbs in accordance with the fixture specification**—DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
11. Replace the top cover (N) with top back plate (L), secure with the screws (M&O).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

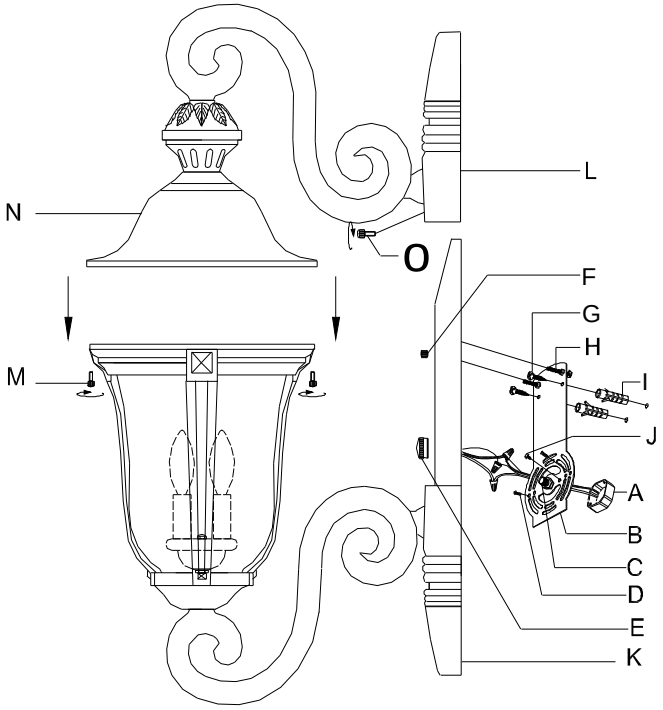

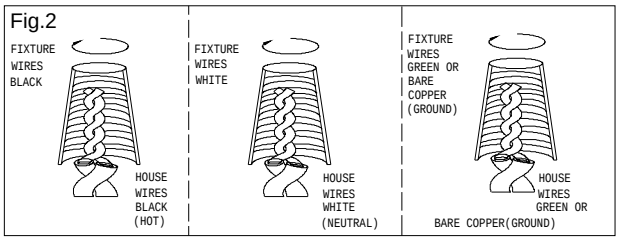
Fig.2
FIXTURE WIRES BLACK
HOUSE WIRES BLACK (HOT)
FIXTURE WIRES WHITE
HOUSE WIRES WHITE (NEUTRAL)
FIXTURE WIRES GREEN OR BARE COPPER (GROUND)
HOUSE WIRES GREEN OR BARE COPPER(GROUND)

"CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR"